

Three-phase Residential Hybrid Inverter



X3-HYB G4 PRO

4kW / 5kW / 6kW / 8kW
10kW / 12kW / 15kW



Smart Management

- V2X ready for smart home energy integration
- Smart Schedule, Smart Scene, and 7*24h ToU
- Wireless meter compatibility
- VPP ready with a variety of compatibility(OpenADR, IEEE2030.5, FCAS, API)①



High Performance

- 20A DC input per MPPT with 3 trackers
- 200% PV oversizing and up to 110% AC output
- Ultra-wide MPPT range of 110-950V



Assured Reliability


- Up to 200% EPS output for 10s
- UPS-level switchover time <10ms
- Optional Rapid Shutdown function for enhanced safety
- Type II SPD on AC&DC side
- Optional AFCI protection




Flexible Adaptability

- Dual battery ports & 2-in-1 function for expansion
- Additional ports for simplified wiring and installation
- Functional and stylish wiring cover
- Microgrid and generator modes for versatile operations

Efficiency Curve (15kW)

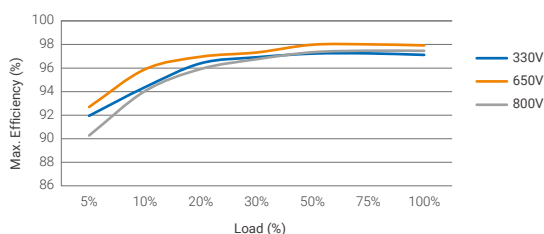

Circuit Diagram

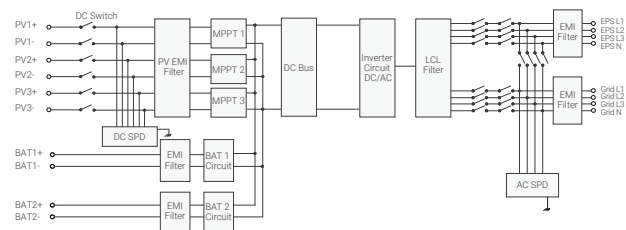

PV INPUT							
Max. recommended PV array power	8 kWp	10 kWp	12 kWp	16 kWp	20 kWp	24 kWp	30 kWp
Max. PV input voltage ^①	1000 V						
Rated PV input voltage	650 V						
Operation voltage range	110 ~ 950 V						
MPPT voltage range ^②	110 ~ 950 V						
Start-up voltage	120 V						
No. of MPP trackers / strings per MPP tracker	2 (1 / 1)			3 (1 / 1 / 1)			
Max. input current per MPPT	20 A / 20 A			20 A / 20 A / 20 A			
Max. input short circuit current per MPPT	25 A / 25 A			25 A / 25 A / 25 A			
AC INPUT & OUTPUT (ON-GRID)							
Rated output power	4000 W	5000 W (AS4777 4999 W)	6000 W	8000 W	10000 W (AS4777 9999 W)	12000 W	15000 W (AS4777 14999 W)
Rated output current	5.8 A	7.2 A	8.7 A	11.6 A	14.5 A	17.5 A	21.8 A
Max. output apparent power	4400 VA	5500 VA (AS4777 4999 VA)	6600 VA	8800 VA	11000 VA (AS4777 9999 VA)	13200 VA	16500 VA (AS4777 14999 VA)
Max. output continuous current	6.7 A	8.4 A	10 A	13.4 A	16.7 A	20.0 A	25.0 A
Rated AC voltage	3 / N / PE, 220 / 380 V 3 / N / PE, 230 / 400 V						
Max. AC input apparent power	8.4 kVA	10.5 kVA	12.6 kVA	16.8 kVA	21.0 kVA		
Max. AC input current	12.2 A	15.2 A	18.2 A	24.3 A	30.4 A		
Rated AC frequency	50 Hz / 60 Hz						
AC frequency range ^③	50 ± 5 Hz / 60 ± 5 Hz						
Adjustable power factor range	~ 1 (0.8 lagging to 0.8 leading)						
THDi (rated power)	< 3%						
BATTERY							
Battery type	Lithium						
Battery voltage range ^④	120 ~ 800 V						
Max. charge / discharge current ^⑤	50 A (25 A × 2)						
EPS (OFF-GRID) OUTPUT (WITH BATTERY)							
Rated EPS output voltage, frequency	230 V / 400 V, 50 Hz / 60 Hz						
Rated EPS output power	4 kVA	5 kVA	6 kVA	8 kVA	10 kVA	12 kVA	15 kVA
Peak EPS output power	2 times of rated power, 10 s						
Switchover time	< 10 ms						
EFFICIENCY							
Max. efficiency	98.0%						
European efficiency	97.7%						
ENVIRONMENT LIMIT							
Ingress protection	IP66						
Operation temperature range	-35 ~ 60°C (> 45°C derating)						
Max. operation altitude	3000 m						
Relative humidity	4 ~ 100% RH (condensing)						
Overvoltage category	Mains: III, Battery: II, PV: II						
GENERAL							
Dimensions (W × H × D)	560 × 503 × 210 mm						
Net weight	38 kg						
Cooling concept	Natural cooling				Smart air cooling		
Communication interfaces	COM1 (Parallel 1, Parallel 2, BMS 1, BMS 2, RS485, Meter / CT); COM2 (DI/DO, EVC, XHUB, DRM, V2X, Heatpump)						
Power consumption (night)	< 40 W for standby, < 5 W for idle						
Topology	Non-isolated						
Certifications	IEC62109-1 / IEC62109-2, VDE 0126-1-1 A1:2012, VDE-AR-N 4105, G98, G99, AS4777, EN50549, CEI 0-21						
PROTECTION							
Protection	Over / under voltage protection, DC isolation protection, DC reverse-polarity protection, Grid monitoring, DC injection monitoring, Back feed current monitoring, Residual current detection, Over temperature protection, AC overcurrent protection, AC short-circuit protection						
Active anti-islanding method	Frequency shift						
Surge protection	DC: Type II, AC: Type II						
Arc-fault circuit interrupter (AFCI)	Optional						

①The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage the inverter ②Input voltage exceeding the MPPT voltage range may trigger inverter protection ③The AC frequency range may vary from different country codes ④Compatible with a minimum of 3 units of HS25/HS36 batteries, but if the total voltage of the 3 batteries is less than 127V and there is no PV input, the system will not be able to startup ⑤If only one port is connected to a single battery, it's 30A. If both ports are connected to a single battery using a 2-in-1 splitter cable (sold separately), it's 50A