

**Full-Color**

**Turret Network Camera**

MODEL: InSight S455 (2.8mm)



**5MP | H.265+**  
InSight S455

Human & Vehicle  
Classification

Smart Detection

Active Defense

True WDR


People & Vehicle  
Analytics<sup>s</sup>

## // Human & Vehicle Classification

Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



## // Smart Detection



Intrusion Detection



Line-Crossing  
Detection



Object Removal  
Detection



Abandoned Object  
Detection




Region Entering  
Detection



Region Exiting  
Detection



Loitering  
Detection




Scene Change  
Detection

## // VIGI Surveillance Solution

The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

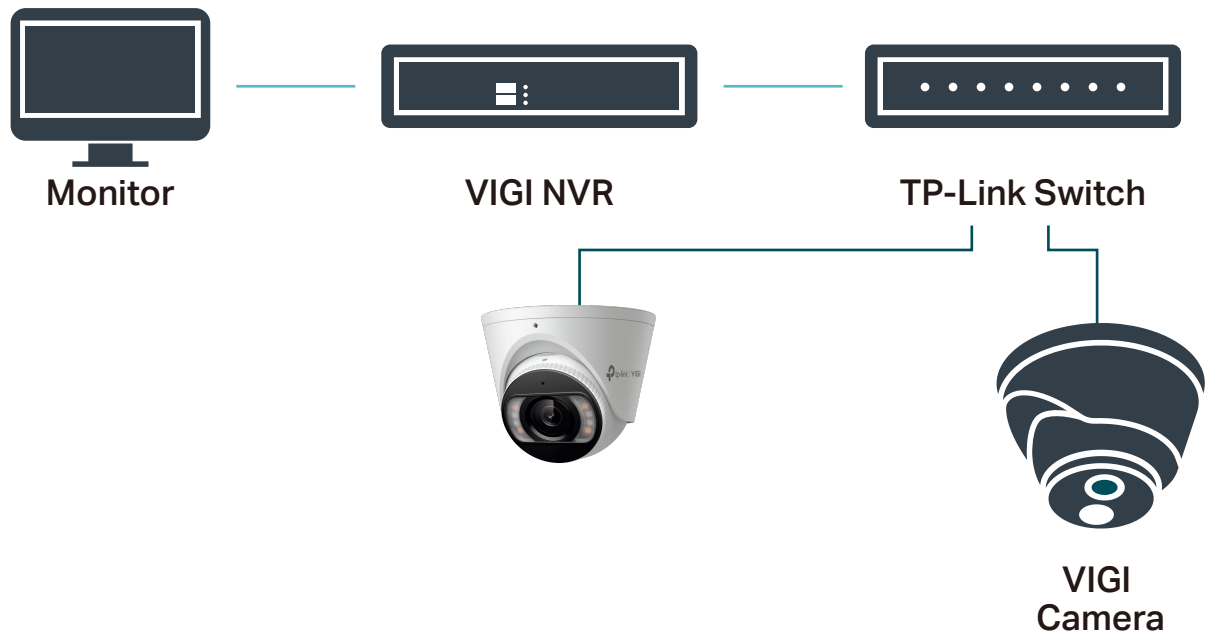

## // Flexible Installation

Easily route your camera's cable into a dropped ceiling or avoid drilling by slotting it through the camera's side outlet.



**// Build Features**



## // Specifications

| Camera                     |                                                                                                                |
|----------------------------|----------------------------------------------------------------------------------------------------------------|
| Product Model              | InSight S455 (2.8m)                                                                                            |
| Image Sensor               | 1/2.65" Progressive Scan CMOS                                                                                  |
| Min. Illumination          | 0.005 Lux; 0 Lux with IR/White Light                                                                           |
| Shutter Speed              | 1/3 to 1/10000 s                                                                                               |
| Slow Shutter               | Yes                                                                                                            |
| Day & Night Mechanism      | IR Cut Filter                                                                                                  |
| Day/Night Switch           | Unified/Scheduled/Auto                                                                                         |
| Lens                       |                                                                                                                |
| Type                       | Fixed Focal Lens                                                                                               |
| Focal Length               | 2.8 mm                                                                                                         |
| Aperture                   | F1.6                                                                                                           |
| FOV                        | • 2.8 mm:<br>Horizontal FOV: 108.3°, Vertical FOV: 59.9°, Diagonal FOV: 126.8°                                 |
| Lens Mount                 | M12*P 0.5                                                                                                      |
| DORI Distance              | • 2.8 mm<br>Detect: 64 m (210 ft)<br>Observe: 27 m (89 ft)<br>Recognize: 13 m (43 ft)<br>Identify: 6 m (20 ft) |
| Angle Adjustment (manual)  |                                                                                                                |
| Range                      | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°                                                         |
| Illuminator                |                                                                                                                |
| Illuminator Type           | • 4× IR LED<br>• 4× White LED                                                                                  |
| Illuminator Distance       | 30 m (98 ft)                                                                                                   |
| Illuminator On/Off Control | Auto/Scheduled/Always on/Always off                                                                            |



| Video                    |                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. Resolution          | 2880 X 1620                                                                                                                                                                                                                                                                                                                                                                    |
| Main Stream              | <ul style="list-style-type: none"> <li>• Frame Rate<br/>50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps<br/>60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps</li> <li>• Resolution:<br/>2880x1620, 2688x1520, 2304x1296, 2048x1280, 1920x1080, 1280x720</li> <li>• Note:<br/>If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</li> </ul> |
| Sub-Stream               | <ul style="list-style-type: none"> <li>• Frame Rate<br/>50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps<br/>60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps</li> <li>• Resolution:<br/>848x480, 704x576, 640x480, 640x360, 352x288, 320x240</li> <li>• Note:<br/>If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</li> </ul>            |
| Bit Rate Control         | CBR, VBR                                                                                                                                                                                                                                                                                                                                                                       |
| Video Compression        | Main stream: H.265/H.265+/H.264/H.264+<br>Sub-stream: H.265/H.264                                                                                                                                                                                                                                                                                                              |
| H.264 Type               | High Profile                                                                                                                                                                                                                                                                                                                                                                   |
| H.264+                   | Main Stream Supported                                                                                                                                                                                                                                                                                                                                                          |
| H.265 Type               | Main Profile*                                                                                                                                                                                                                                                                                                                                                                  |
| H.265+                   | Main Stream Supported*                                                                                                                                                                                                                                                                                                                                                         |
| Video Bit Rate           | <ul style="list-style-type: none"> <li>• Main Stream: 256 Kbps to 6 Mbps</li> <li>• Sub-Stream: 64 Kbps to 512 Kbps</li> </ul>                                                                                                                                                                                                                                                 |
| Image                    |                                                                                                                                                                                                                                                                                                                                                                                |
| Image Settings           | <ul style="list-style-type: none"> <li>• Mirror</li> <li>• Rotation</li> <li>• Brightness</li> <li>• Contrast</li> <li>• Saturation</li> <li>• Sharpness</li> <li>• Exposure</li> <li>• WDR</li> <li>• White balance</li> <li>• Prevent overexposure to infrared light</li> <li>• HLC Adjustable by Client Software</li> </ul>                                                 |
| Image Enhancement        | BLC/3D DNR/HLC/SmartIR                                                                                                                                                                                                                                                                                                                                                         |
| Wide Dynamic Range (WDR) | 120 dB<br>Note: When People & Vehicle Analytics is enabled, only DWDR is supported.                                                                                                                                                                                                                                                                                            |

|                             |                                                                                                                               |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| SNR                         | ≥ 52 dB                                                                                                                       |
| Image Parameters Switch     | Yes                                                                                                                           |
| Privacy Mask                | Up to 4 Masks                                                                                                                 |
| ROI                         | 1 Region                                                                                                                      |
| OSD Setting                 | Yes                                                                                                                           |
| <b>Audio</b>                |                                                                                                                               |
| Audio Communication         | Two-Way Audio                                                                                                                 |
| Audio Input                 | Yes (Built-in Microphone)                                                                                                     |
| Audio Output                | Yes (Built-in Speaker)                                                                                                        |
| Audio Compression           | Yes                                                                                                                           |
| Audio Sampling Rate         | 8KHz                                                                                                                          |
| Environment Noise Filtering | Yes                                                                                                                           |
| Audio Bit Rate              | 64 Kbps (G.711 alaw)                                                                                                          |
| <b>Network</b>              |                                                                                                                               |
| Protocols                   | TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, 802.1x, DNS, RTSP, NTP, UPnP, SSL/TLS, FTP/SFTP, RTP, IPv4, IPv6, ARP, SMTP, SNMP, RTMP |
| API                         | Open Network Video Interface (Profile S/T/G)                                                                                  |
| Web Browser                 | Google Chrome® 57 and above<br>Firefox® 52 and above<br>Safari® 11 and above<br>Microsoft® Edge 91 and above                  |
| Security                    | Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication, 802.1X authentication                        |
| Simultaneous Live View      | 3 Main Streams & 3 Sub-Streams                                                                                                |
| Client                      | VIGI App, Web UI, VIGI VMS, VIGI Cloud VMS, VIGI Config Tool, VIGI PC Client                                                  |
| Cloud                       | Yes                                                                                                                           |
| ONVIF                       | Yes                                                                                                                           |
| <b>Interface</b>            |                                                                                                                               |
| Network Interface           | 1 RJ45 10/100M Self-Adaptive Ethernet Port, PoE                                                                               |
| On-board Storage            | Built-In Memory Card Slot, Support MicroSD Card, up to 512 GB**                                                               |
| Built-in Speaker            | Yes                                                                                                                           |
| Built-in Microphone         | Yes; Records Anything Going on within a 16.4-ft (5 m) Radius of the Camera                                                    |
| Audio                       | N/A                                                                                                                           |
| Alarm                       | N/A                                                                                                                           |
| Reset Button                | Yes                                                                                                                           |
| Power                       | DC Power Port                                                                                                                 |

| Alarm and Event Management     |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Smart Event                    | <ul style="list-style-type: none"> <li>• Intrusion Detection</li> <li>• Line-Crossing Detection</li> <li>• Region Entering Detection</li> <li>• Region Exiting Detection</li> <li>• Object Abandoned Detection</li> <li>• Object Removal Detection</li> <li>• Loitering Detection</li> <li>• People Detection</li> <li>• Vehicle Detection</li> <li>• Abnormal Sound Detection</li> <li>• Scene Change Detection</li> </ul> |
| Basic Event                    | <ul style="list-style-type: none"> <li>• Motion Detection (Enhanced with Human &amp; Vehicle Classification for more accurate alerts)</li> <li>• Video Tampering Detection</li> <li>• Exception (Illegal Login)</li> </ul>                                                                                                                                                                                                  |
| Alarm Linkage                  | <ul style="list-style-type: none"> <li>• Memory Card Video Recording</li> <li>• Upload to FTP server</li> <li>• Push Notifications</li> <li>• Active Defence-Sound Alarm</li> <li>• Active Defence-Light Alarm</li> <li>• Email Alarm</li> <li>• Send to Alarm Server</li> </ul>                                                                                                                                            |
| Deep Learning Function         |                                                                                                                                                                                                                                                                                                                                                                                                                             |
| People & Vehicle Analytics     | Search and filter to people or vehicle of interest based on many different attributes, making post-event search faster and easier. <sup>§</sup>                                                                                                                                                                                                                                                                             |
| General                        |                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Operating Temperature          | -30 °C to 60 °C (-22 °F to 140 °F)                                                                                                                                                                                                                                                                                                                                                                                          |
| Storage Temperature            | -40 °C to 60 °C (-40 °F to 140 °F)                                                                                                                                                                                                                                                                                                                                                                                          |
| Operating Humidity             | 95% or Less (Non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                |
| Storage Humidity               | 95% or Less (Non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                |
| Power Supply                   | <ul style="list-style-type: none"> <li>• 12V DC ± 5%, Max. 11 W, 5.5 mm Coaxial Power Plug</li> <li>• PoE: 802.3af/at, class 0, Max. 12 W</li> </ul>                                                                                                                                                                                                                                                                        |
| Material                       | Metal                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Protection                     | IP67                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Product Dimensions (L x W x H) | 4.4 × 4.4 × 3.3 in (111 × 111 × 83.7 mm)                                                                                                                                                                                                                                                                                                                                                                                    |
| Package Contents               | VIGI Network Camera<br>Quick Start Guide<br>Waterproof Cable Attachments<br>Mounting Accessories                                                                                                                                                                                                                                                                                                                            |
| Net Weight                     | 0.48 Kg                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Certifications                 | CE, NTRA, VCCI, KC, BSMI, FCC, IC                                                                                                                                                                                                                                                                                                                                                                                           |

## Dimensions

Unit: inch [mm]

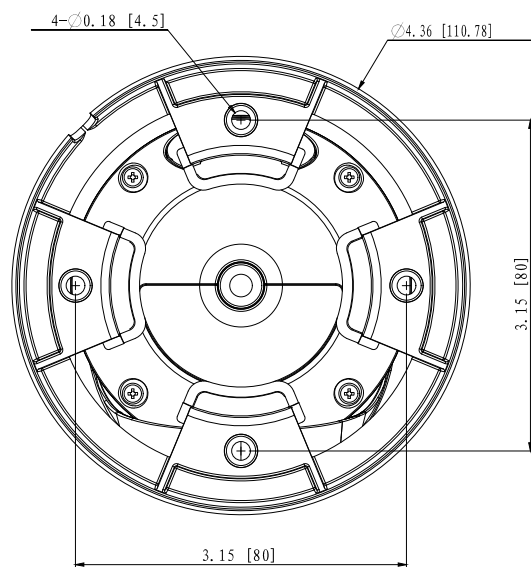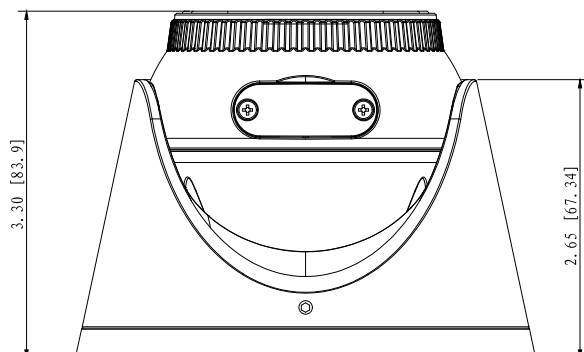

<sup>§</sup>This function must be used with VIGI specified software.

<sup>Δ</sup>When People & Vehicle Analytics is enabled, only DWDR is supported.

\*\*SD card is not included in the package.

Specifications are subject to change without notice and can be found at [www.vigi.com](http://www.vigi.com).

©2026 TP-Link