


保密文件

受控

## 10in 10out PV Junction Box

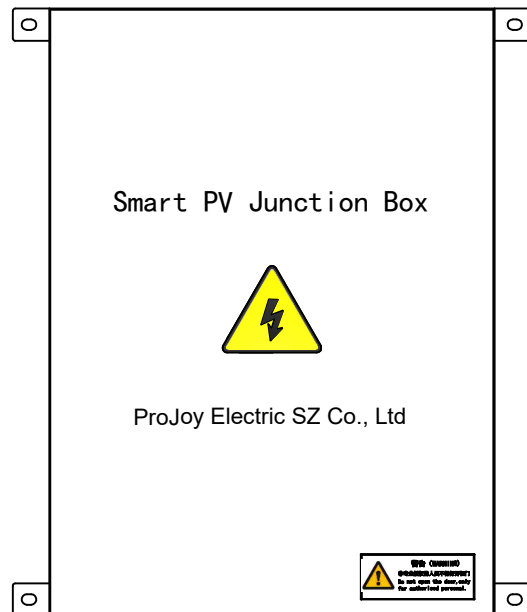

### Technical parameters:





Rated voltage	1000V DC
Max. number of DC input strings	10
Number of DC output	10
MCB rated current	25A
Protection level	IP65
Operating ambient temp.	-25° C ~ +50° C
Ambient humidity	5~95%
Altitude	≤2000m
W*H*D	550*750*150mm
Weight	~ 40kg
Monitor	NO
Diode	No
Installation	Vertical Mounting

保密文件

受控

Technical data:

1. IP65;
2. Dimension units: mm;
3. RAL7035;
4. Material: 1.5 mm cold-rolled plate.

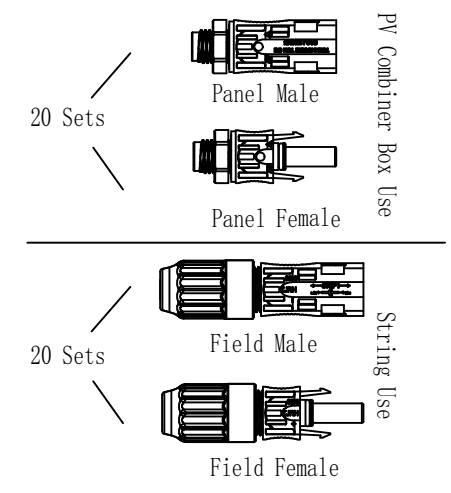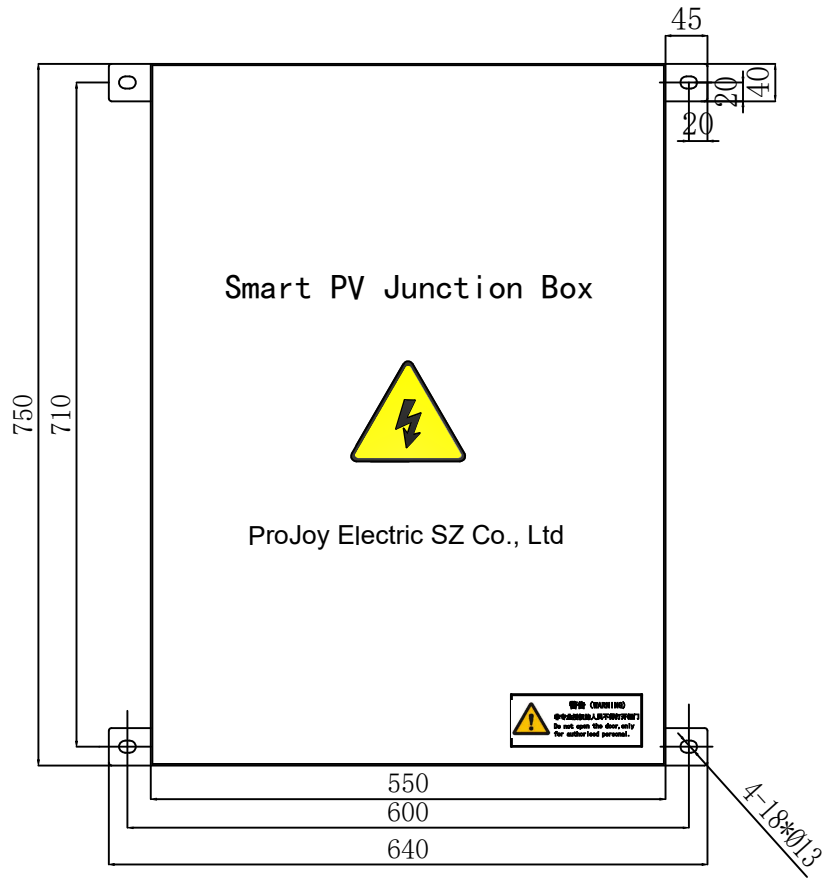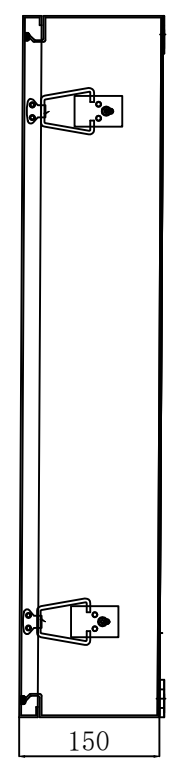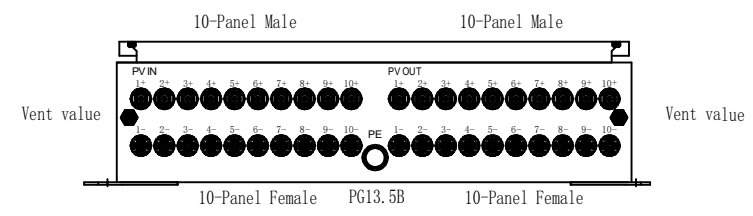


In the form of accessory package in the product, sent to the site


Cable connector/gland List

No.	Name	Type	Qty
1	Cable connector	Panel Male	20
2	Cable connector	Panel Female	20
3	Cable gland	PG13.5B/Bayonet 6-12mm	1
4	Vent value	M12	2

										10in 10out PV Junction Box-Appearance		
Sign	Pcs	Zoning	Rev. No.	Signature	Date	Stage Markers		Weight	Scale	Figure Number:		
Design			Standard						1:5	Project Name::		
Proof			Approval									
Check			Authorize									
Technique			T. C							Five pages, page 1		

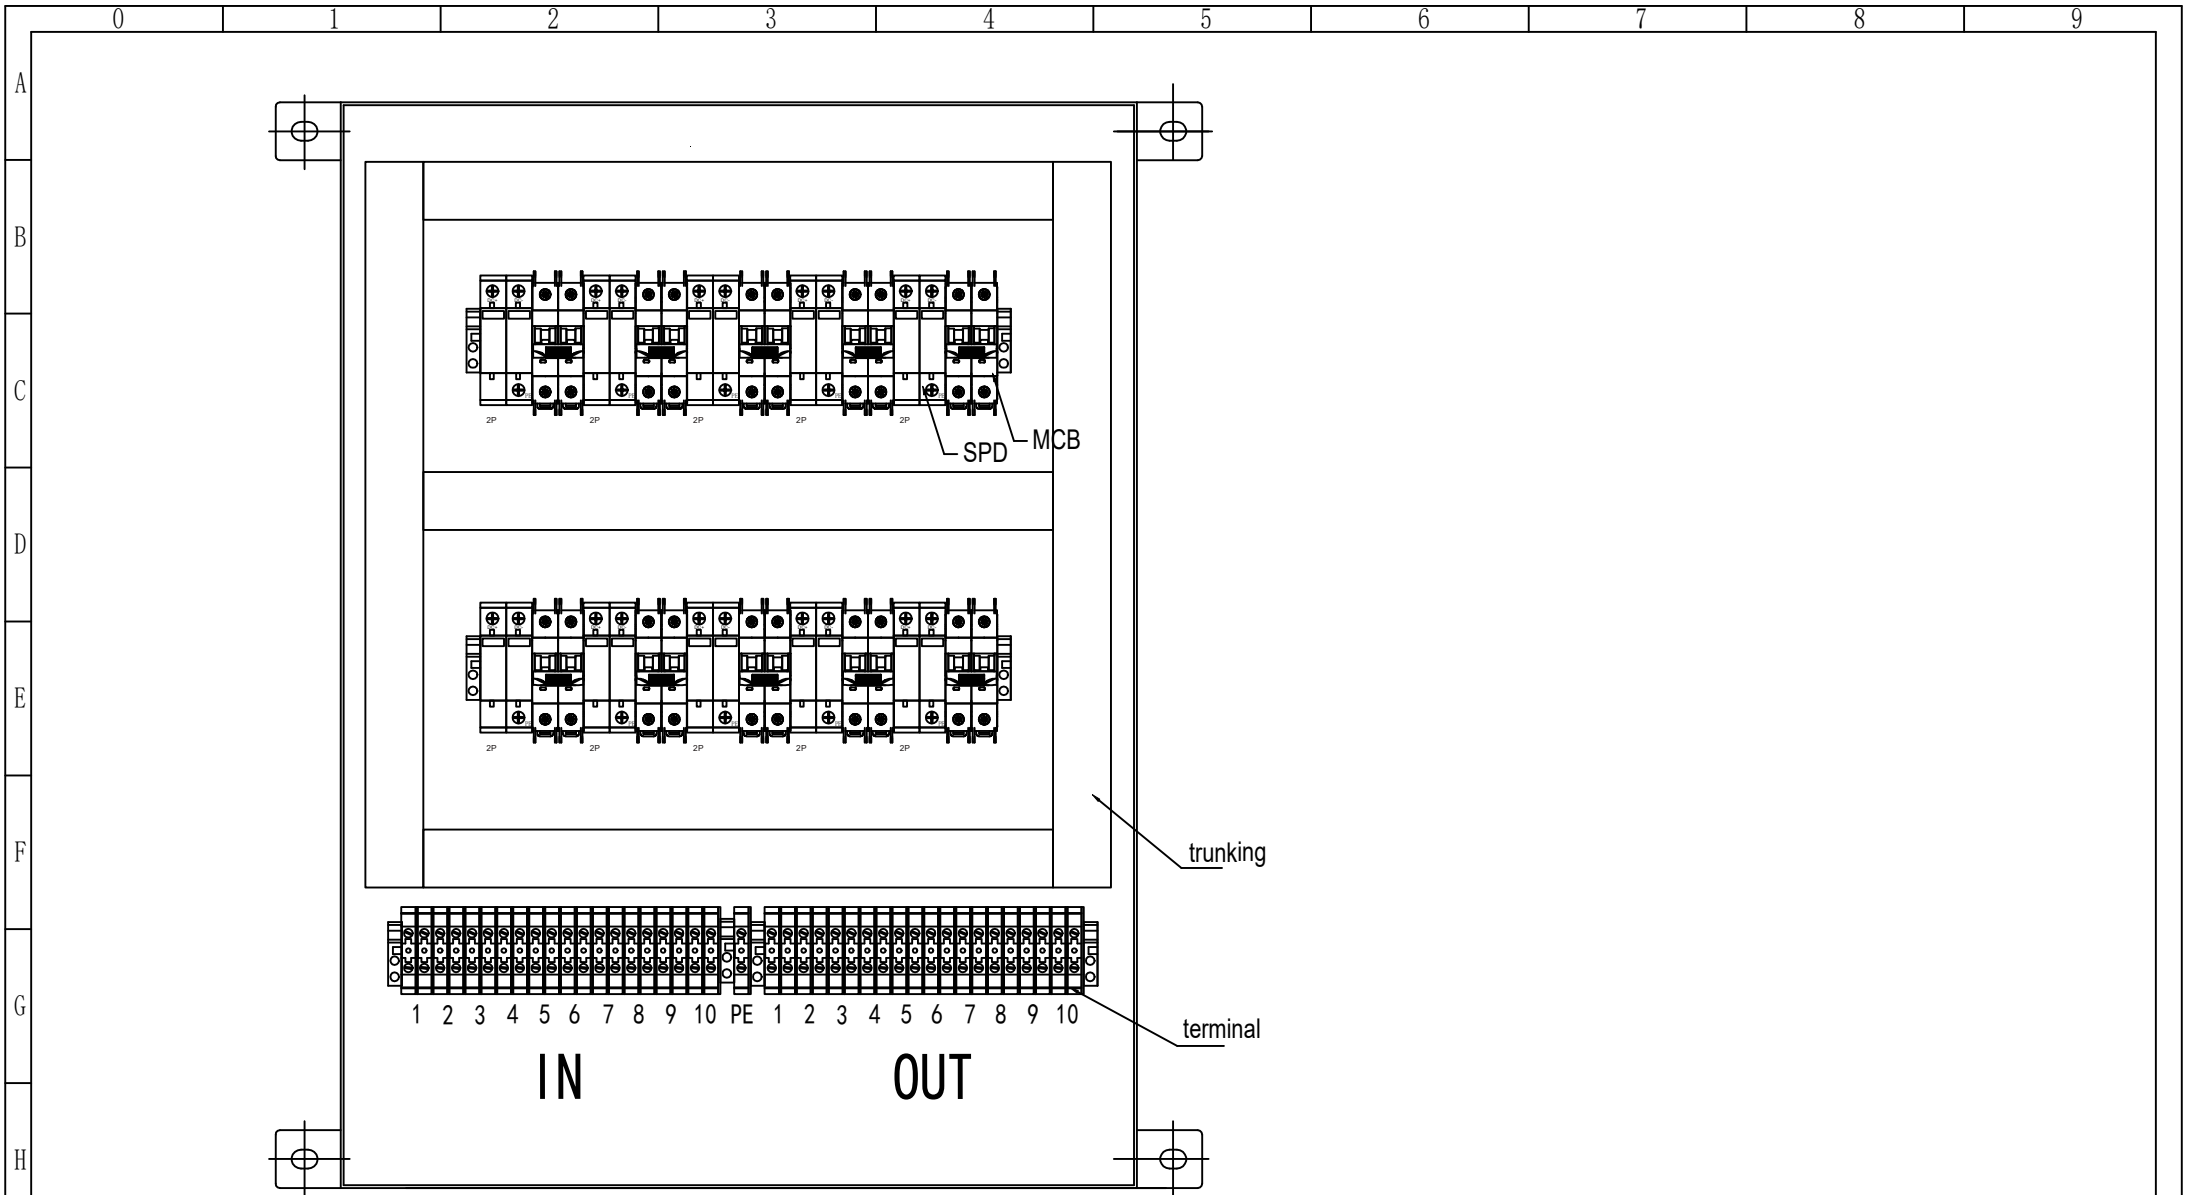

						10in 10out PV Junction Box-Layout		
Sign	Pcs	Zoning	Rev. No.	Signature	Date			Figure Number:
Design			Standard			Stage Markers	Weight	Scale
Proof			Approval					1:5
Check			Authorize					Project Name::
Technique			<b>T. C</b>			Five pages, page 1		

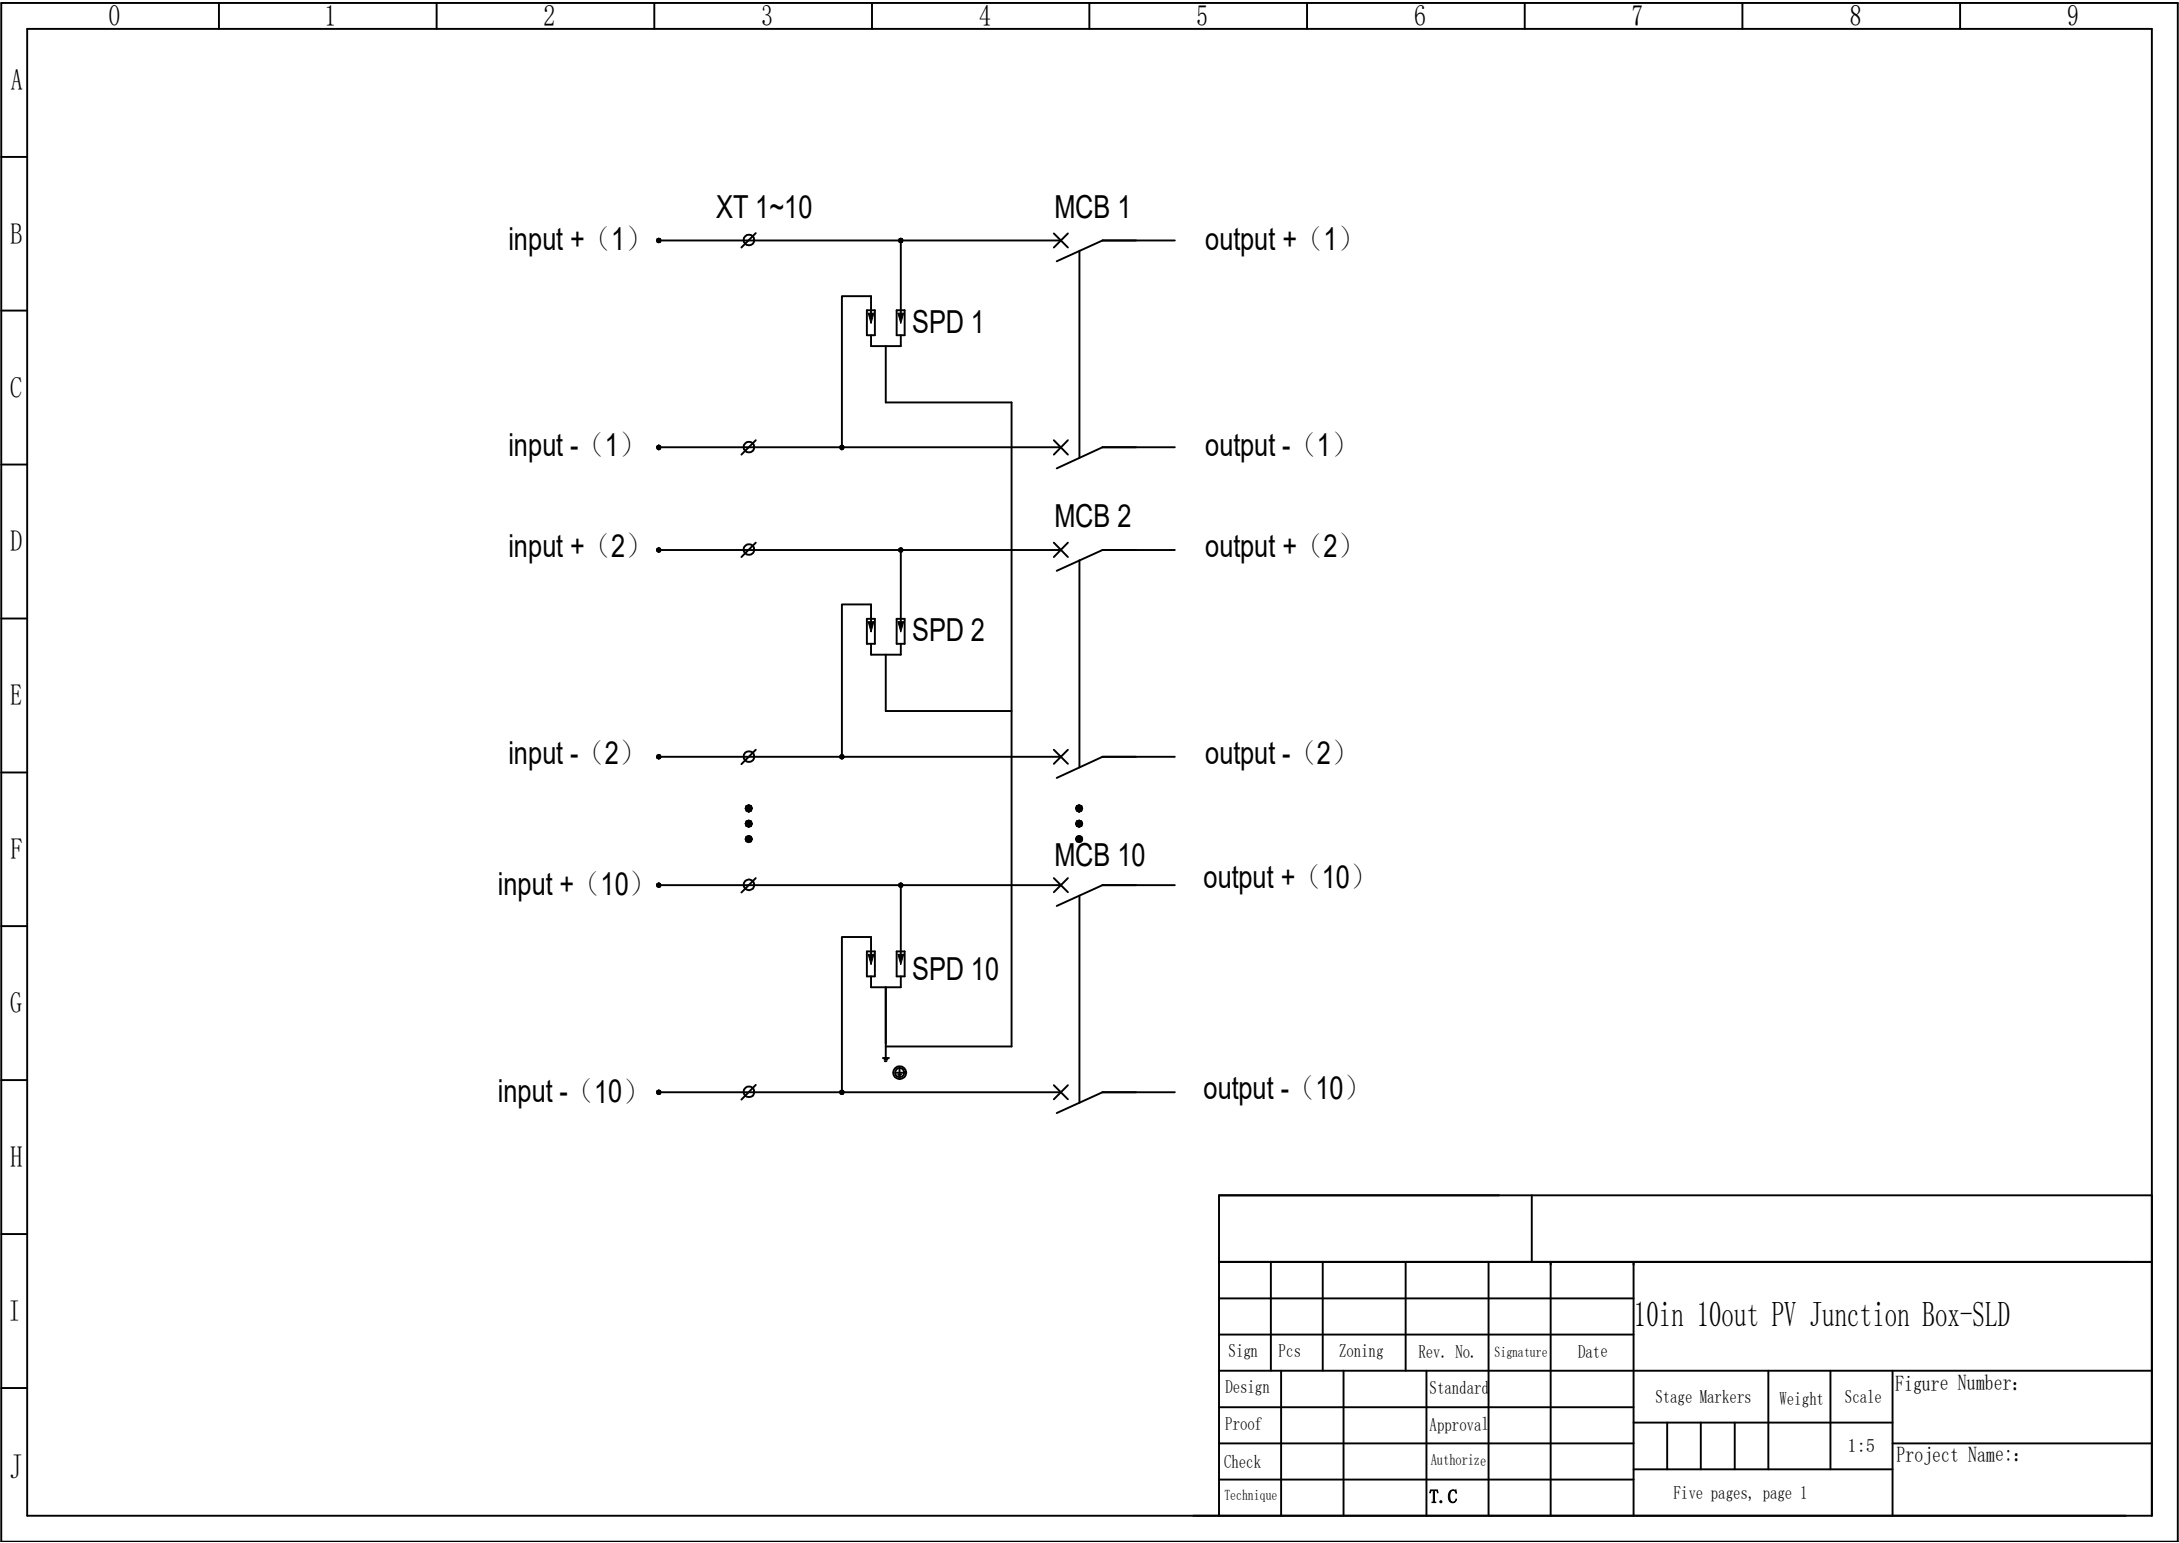


						10in 10out PV Junction Box-SLD					
Sign	Pcs	Zoning	Rev. No.	Signature	Date				Figure Number:		
Design			Standard			Stage Markers	Weight	Scale	Project Name::		
Proof			Approval					1:5			
Check			Authorize								
Technique			<b>T. C</b>			Five pages, page 1					

保密文件

受控

## 9in 9out PV Junction Box

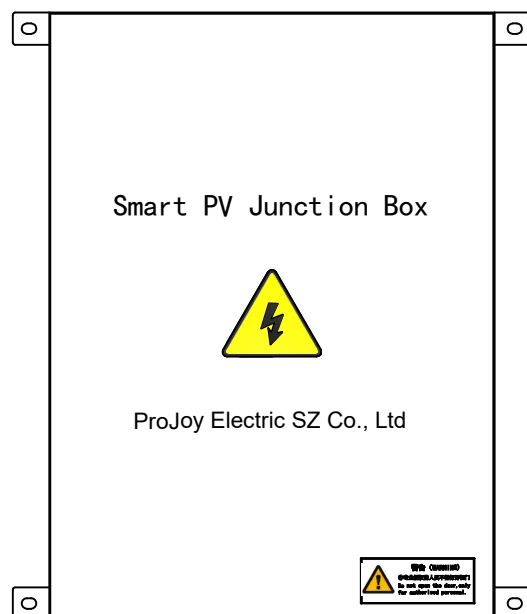

### Technical parameters:





Rated voltage	1000V DC
Max. number of DC input strings	9
Number of DC output	9
MCB rated current	25A
Protection level	IP65
Operating ambient temp.	-25° C ~ +50° C
Ambient humidity	5~95%
Altitude	≤2000m
W*H*D	550*750*150mm
Weight	~ 40kg
Monitor	NO
Diode	No
Installation	Vertical Mounting

保密文件

受控

Technical data:

1. IP65;
2. Dimension units: mm;
3. RAL7035;
4. Material: 1.5 mm cold-rolled plate.

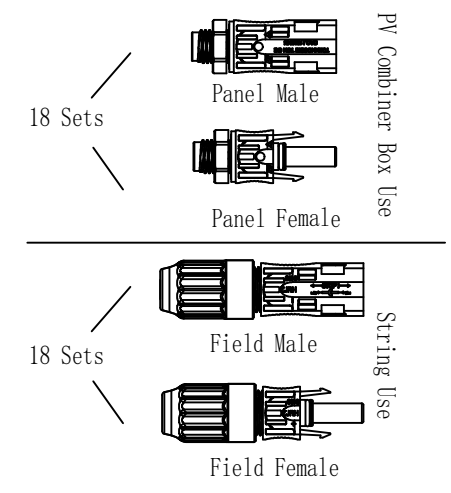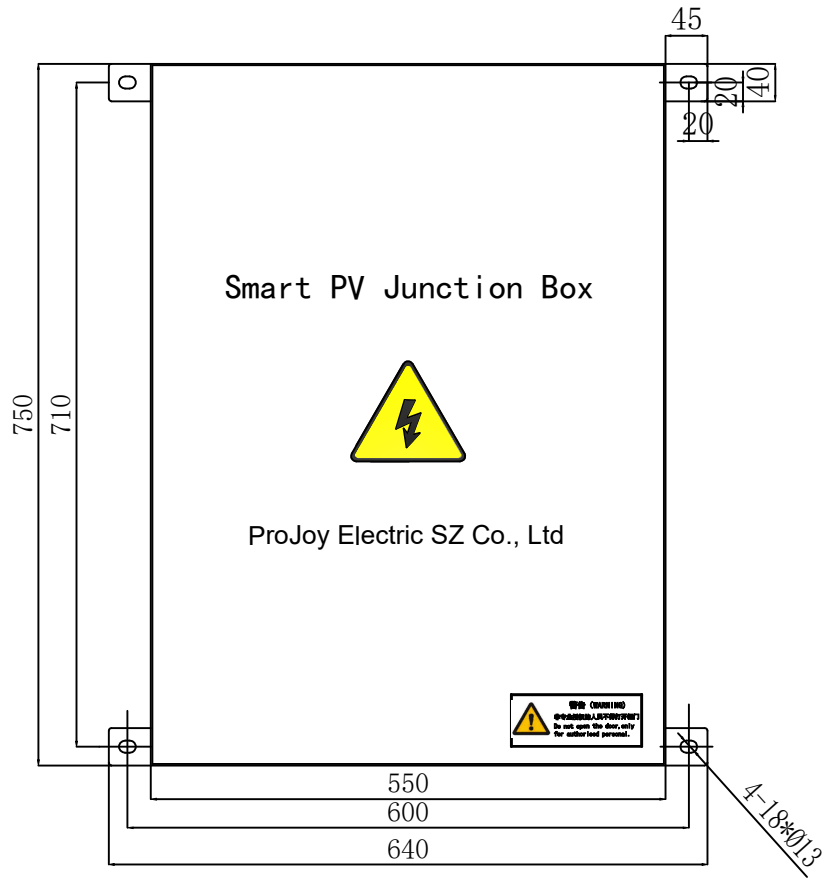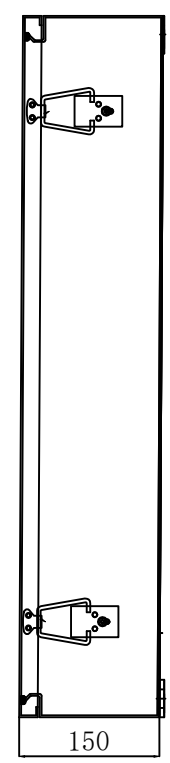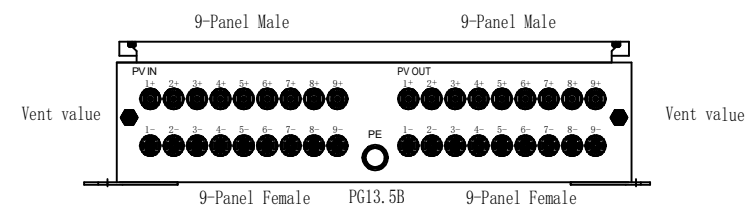


In the form of accessory package in the product, sent to the site


Cable connector/gland List

No.	Name	Type	Qty
1	Cable connector	Panel Male	20
2	Cable connector	Panel Female	20
3	Cable gland	PG13.5B/Bayonet 6-12mm	1
4	Vent value	M12	2

										9in 9out PV Junction Box-Appearance		
Sign	Pcs	Zoning	Rev. No.	Signature	Date	Stage Markers		Weight	Scale	Figure Number:		
Design			Standard						1:5	Project Name::		
Proof			Approval									
Check			Authorize									
Technique			T. C							Five pages, page 1		

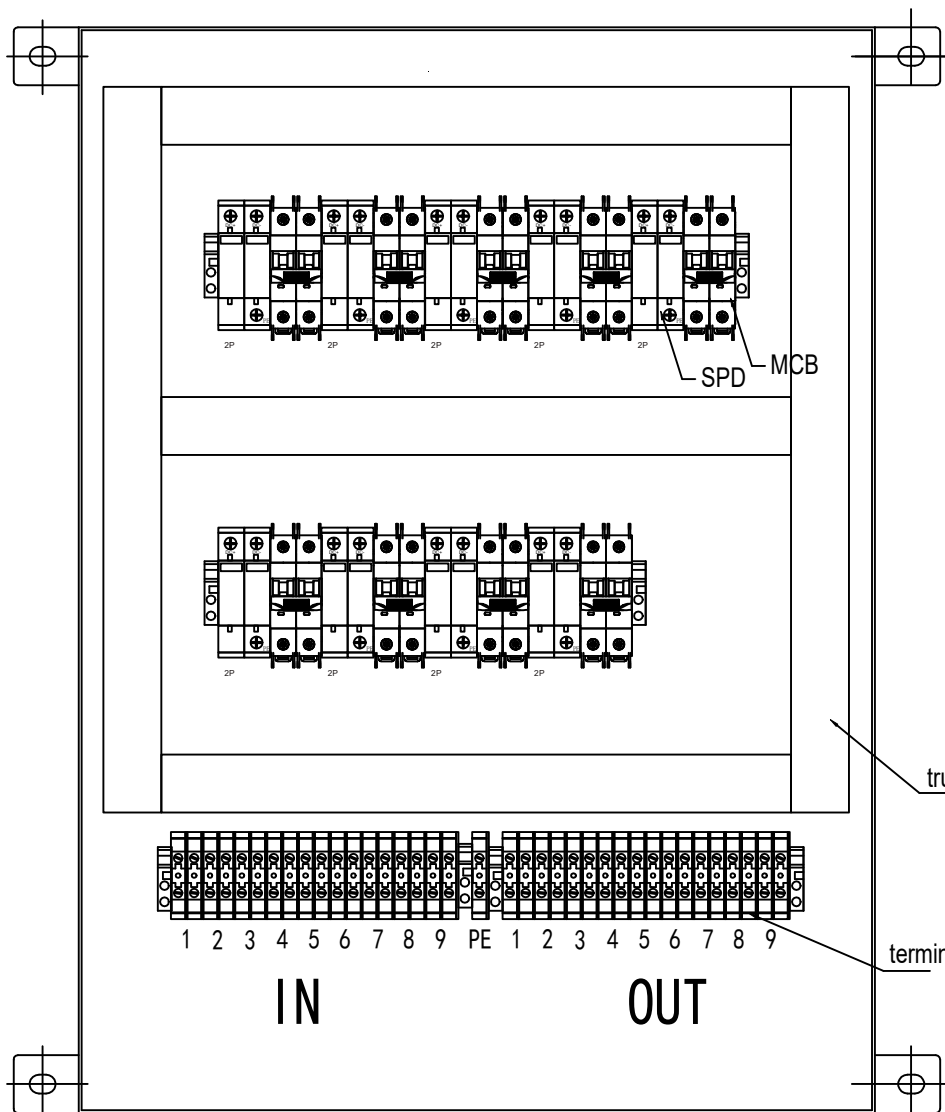

						9in 9out PV Junction Box-Layout		
Sign	Pcs	Zoning	Rev. No.	Signature	Date			Figure Number:
Design			Standard			Stage Markers	Weight	Scale
Proof			Approval					1:5
Check			Authorize					Project Name::
Technique			<b>T. C</b>			Five pages, page 1		

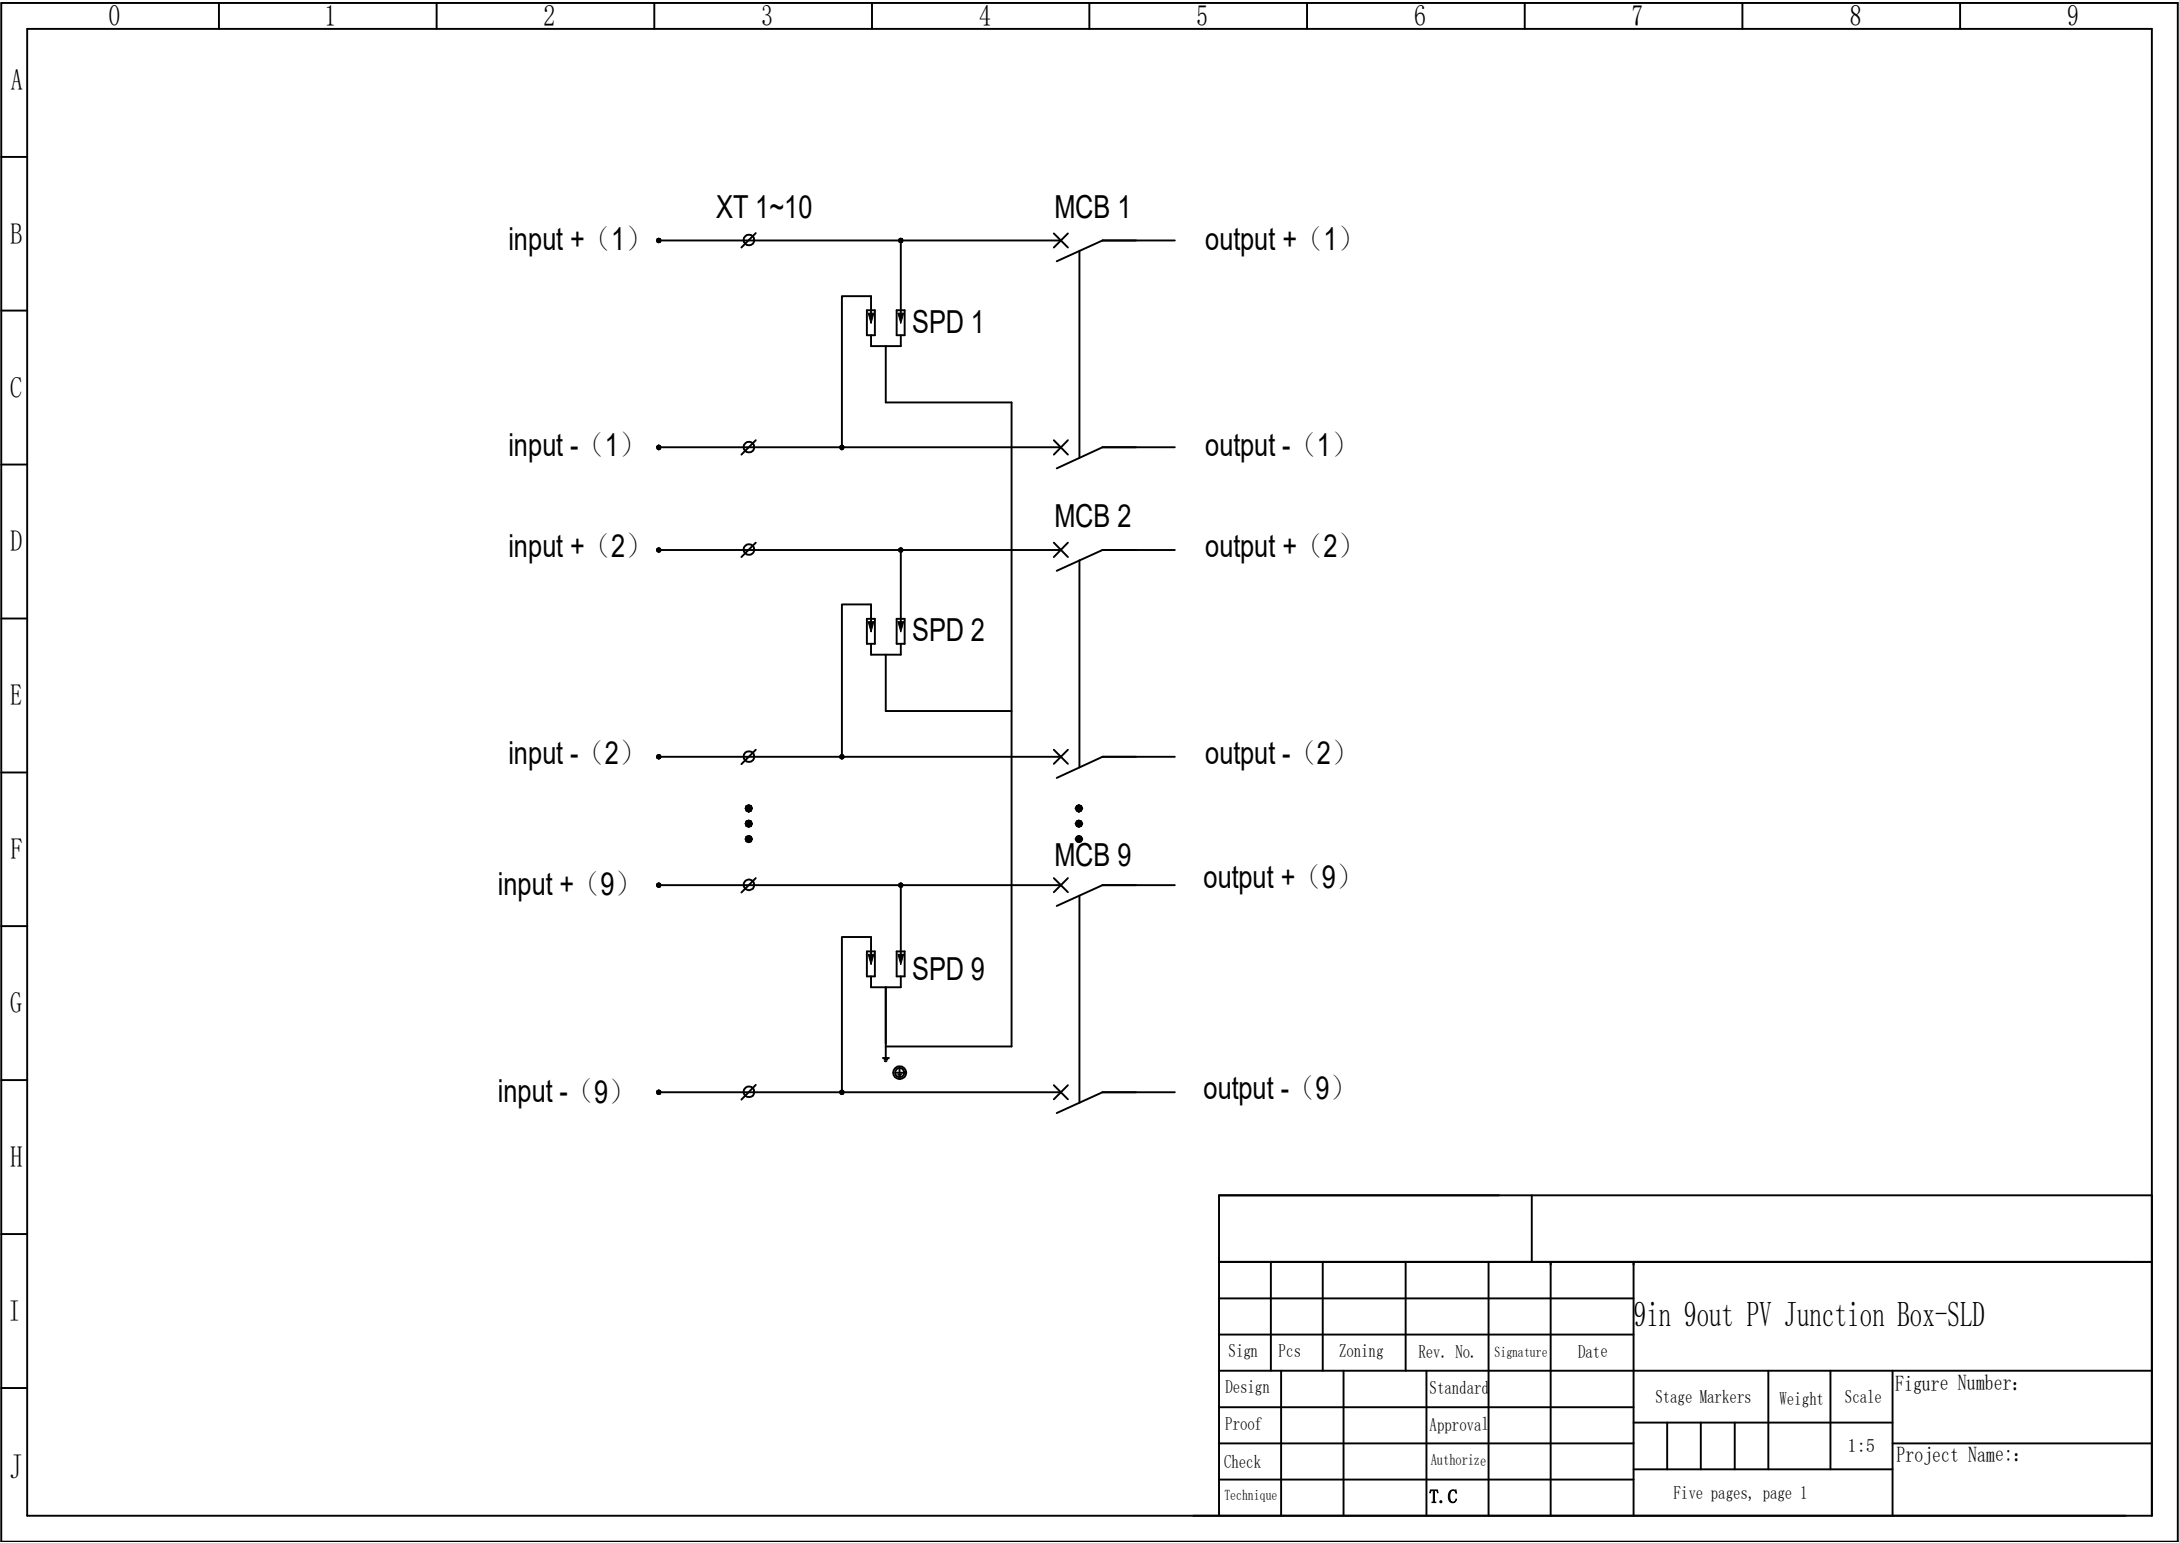

						9in 9out PV Junction Box-SLD			
Sign	Pcs	Zoning	Rev. No.	Signature	Date			Figure Number:	
Design			Standard			Stage Markers	Weight	Scale	Project Name::
Proof			Approval					1:5	
Check			Authorize						Project Name::
Technique			<b>T. C</b>			Five pages, page 1			