



ESS510 Energy Storage System

5.5KW Solar inverter with 5KWh Lithium-ion battery

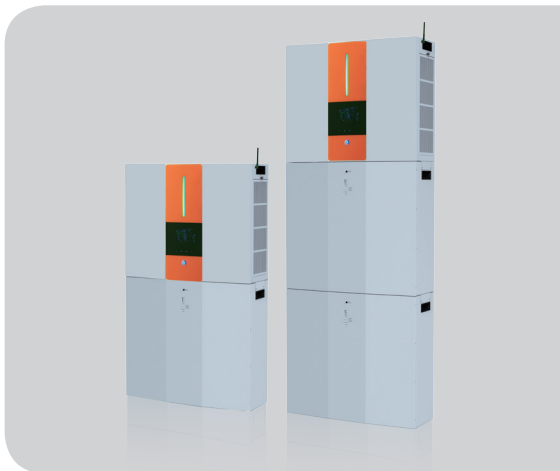


- Integrated 5.5kw hybrid solar inverter and lithium-ion battery module
- Self-consumption and Feed-back to the Grid
- Programmable supply priority for PV, battery or Grid
- User-adjustable battery charging current
- Programmable multiple operation modes: Grid-tie, off-grid and grid-tie with backup
- Built-in timer for various mode of on/off operation
- Multiple communication for USB, RS232, Modbus, SNMP, GPRS and Wi-Fi
- Monitoring software for real-time status display and control
- Enhance AC/Solar charger to 100A
- Scalable Li-Ion battery expansion
- Li-Ion battery life cycle: 8000 cycles at 25 °C
- High surge discharging current up to 3C
- IP 20

System Diagram

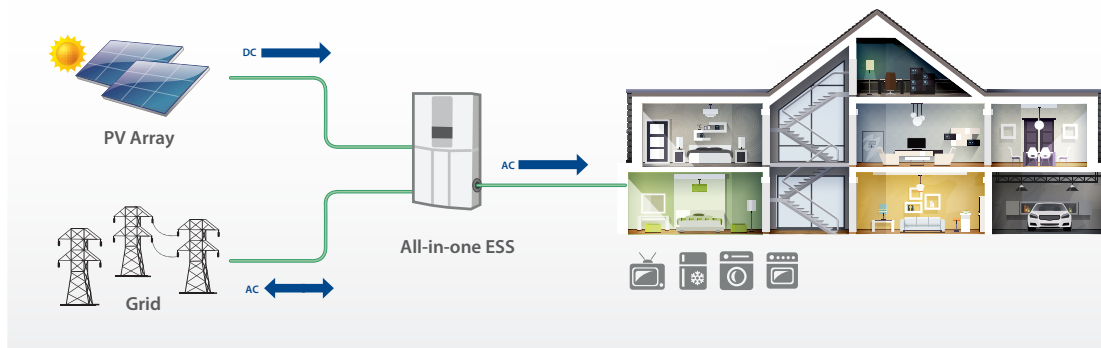

ESS510, 5.5kw hybrid inverter with 5KWh lithium-ion scalable battery module


DIMENSION

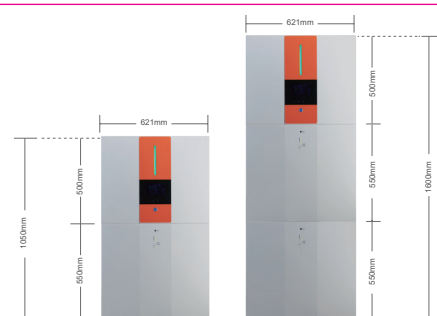

Maximum 10 pcs of battery modules



Wiring cover for parallel battery modules

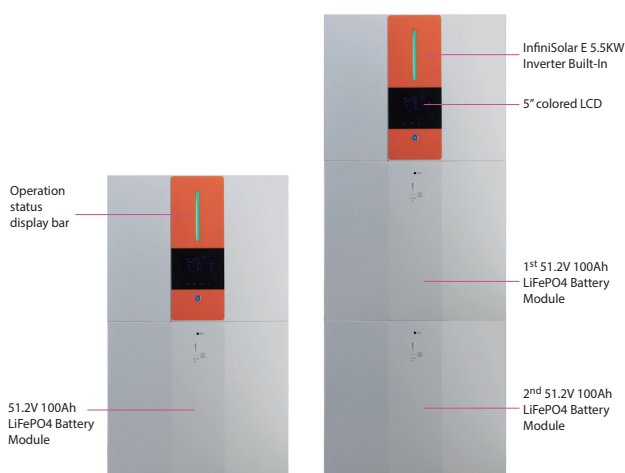

ESS Energy Storage System Specification

INVERTER MODEL	ESS 5.5KW
Maximum PV Input Power	6500W
Rated Output Power	5500W
Maximum Charging Power	2880W
PV INPUT (DC)	
Nominal DC Voltage / Maximum DC Voltage	360 VDC / 500 VDC
Start-up Voltage / Initial Feeding Voltage	116 VDC / 150 VDC
MPP Voltage Range	120 VDC ~ 450 VDC
Number of MPP Trackers / Maximum Input Current	2 / 2 x 13 A
GRID OUTPUT	
Nominal Output Voltage	208/220/230/240 VAC
Output Voltage Range	184 - 264.5 VAC*
Max. Output Current	23.9A*
Maximum Conversion Efficiency (DC/AC)	96%
European Efficiency @ Vnominal	95%
AC INPUT	
AC Start-up Voltage / Auto Restart Voltage	120 - 140 VAC / 180 VAC
Acceptable Input Voltage Range	170 -280 VAC
Maximum AC Input Current	40 A
BATTERY MODE OUTPUT (AC)	
Nominal Output Voltage	208/220/230/240 VAC
Efficiency (DC to AC)	93%
BATTERY CHARGER	
Nominal DC Voltage	48 VDC
Maximum Charging Current	100 A
PHYSICAL	
Dimension, D x W x H (mm)	214 x 621 x 500
Net Weight (kgs)	25

BATTERY MODULE	ESS II-4810
CAPACITY	5000Wh
PARAMETERS	
Nominal Voltage	51.2VDC
Full Charge Voltage (FC)	56V
Full Discharge Voltage (FD)	42V
Typical Capacity	100Ah
Max Continuous Discharging Current	150A
Max Discharging Current	192A at 1min
Protection	BMS, breaker
Charge Voltage	56V
Charge Current	20A (0.2C)
Maximum Charge Current	50A (0.5C)
Standard Charge Method	0.2C CC (Constant current) charge to FC, CV (Constant voltage FC) charge till charge current decline to <0.05C
Inner Resistance	<20m ohm
Dimension, D X W X H (mm)	214 x 621 x 550
Net Weight (kgs)	55

*These figures may vary depending on different AC voltage and contry regulation.
Product specifications are subject to change without further notice.