


Quick Installation Guide

SolaX Adapter Box




I Introduction

SolaX Adapter box is matched with a heat pump with dry contact function, which can realize heat pump integrated photovoltaic inverter energy system management. The inverter can control the Adapter box to use solar energy efficiently according to the requirements set by the user (grid power, battery capacity, time, etc.) Supplying heat pumps is generally applicable when there is surplus solar energy and battery storage capacity. This part of the energy can be used to heat the heat pump within the required temperature range. Please read this guide carefully before using.

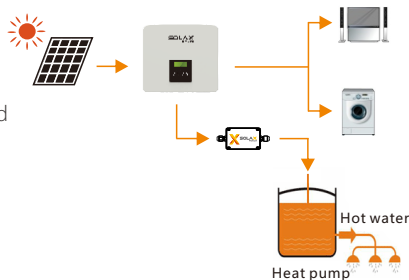


II Overview

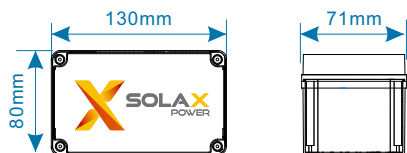

III Packing List

– Check that if there is any distortion or impaired during transportation.





IV Mounting

– Use the marking cardboard to fix it on the wall and determine the location of the hole.



Drill holes with $\Phi 6$ drill.
Depth: at least 30mm.

– Tighten the expansion tubes.

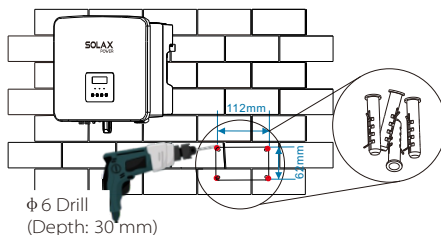



– Dismantle the upper cover of the SolaX Adapter Box.

– Pass the expansion screws through box installation channels.
Screw the expansion screws.

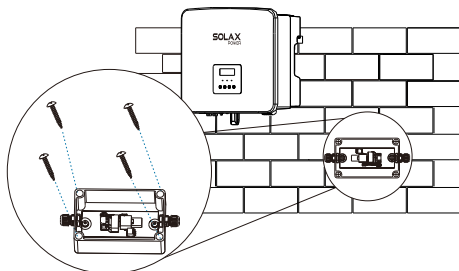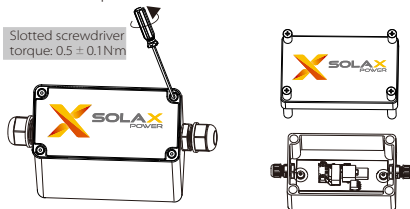


V Wiring

Pictorial wiring diagram:

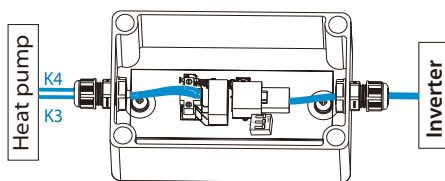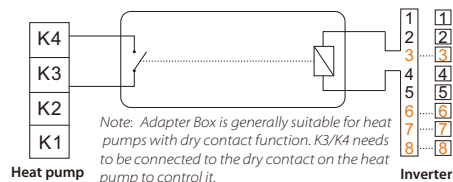


1. Insert the cables through the glands.
2. Make cables, insert it into the RJ45 connector in the box and tighten the waterproof terminal.
(Conventional Communication cable)
3. Insert the inverter port and tighten the waterproof terminal.

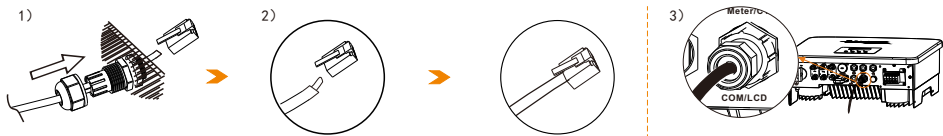


COM/RS485 PIN Definition

	1	2	3	4	5	6	7	8
	X	X	+13V	X	X	GND	Drycontact_A(out)	Drycontact_B(out)

Note: Inverter terminal communication wiring pins, SolaX's X1-Hybrid G4/X3-Hybrid G4 series use pins 3, 6, 7 and 8, and the switch defaults to "123"; Specially SolaX grid-connected inverters use pins 3 and 6. Turn these three switches to "ON". If necessary, please contact our SolaX team.



4. Connect the cables to the through-hole terminals and tighten them. Wire specifications: outer diameter(3.5-5.5) mm.
5. Assemble the upper cover of the SolaX Adapter Box.

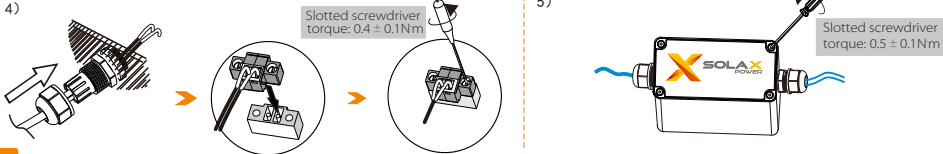


VI Setting

-All Smart Grid Ready heat pumps have four controllable operating modes. SolaX recommends switching between operating modes 2 and 3. The switching is realized by an external relay, which is controlled by the SolaX inverter. Operating mode

Operating mode 2 – standard operation	Relay open contact
Operating mode 3 – increasing temperature mode	Relay closed contact

-To use the heat pump function, users need to set the inverter LCD screen, press the following menu to enter: "Load Management", select "Smart save" to set.

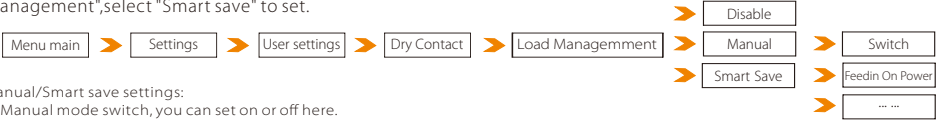

Manual/Smart save settings:

- (a) Manual mode switch, you can set on or off here.
- (b) When the input power of the inverter is greater than or equal to the set value, at the same time (c) when the battery reaches the set capacity, the dry contact in the adapter box is closed.
- (d) When the power consumed by the load is greater than or equal to the setting value, the dry contacts are open.
- (e) When the battery capacity falls reach the setting value, the dry contacts are open.
- (f) The minimum duration for the dry contacts to maintain the closed state, during this time (d)/(e) will not be triggered until the end.
- (g) This setting time means that after the maximum cumulative time that the dry contact is in the closed state at different times of the day exceeds this value, then (b)/(c) will not be triggered to close again on that day.
- (h) Dry contacts are closed under the two work periods set by users while the schedule is enabled. This logic is higher than the (d)/(e) and lower than the (g).
- (h-1)/(h-2)/(h-3)/(h-4) You can set the power-on time and shutdown time of the heat pump. Two time periods can be set.

Load Management > Switch ON/OFF (a)	Load Management > Feedin On Power 3000W (b)	Load Management > Switch ON Soc 80% (c)	Load Management > Consume OFF Power 500W (d)	Load Management > Switch OFF Soc 40% (e)	Load Management > Minimum duration per on-signal 5M (f)
Load Management > Maximum duration per day 900M (g)	Load Management > Schedule Disable/Enable (h)	Load Management > Work Period 1 Start Time (h-1)	Load Management > Work Period 1 End Time (h-2)	Load Management > Work Period 2 Start Time (h-3)	Load Management > Work Period 2 End Time (h-4)