


Himalaya G12 Series

710W

132-cell Bifacial HJT Half Cell
Solar Module

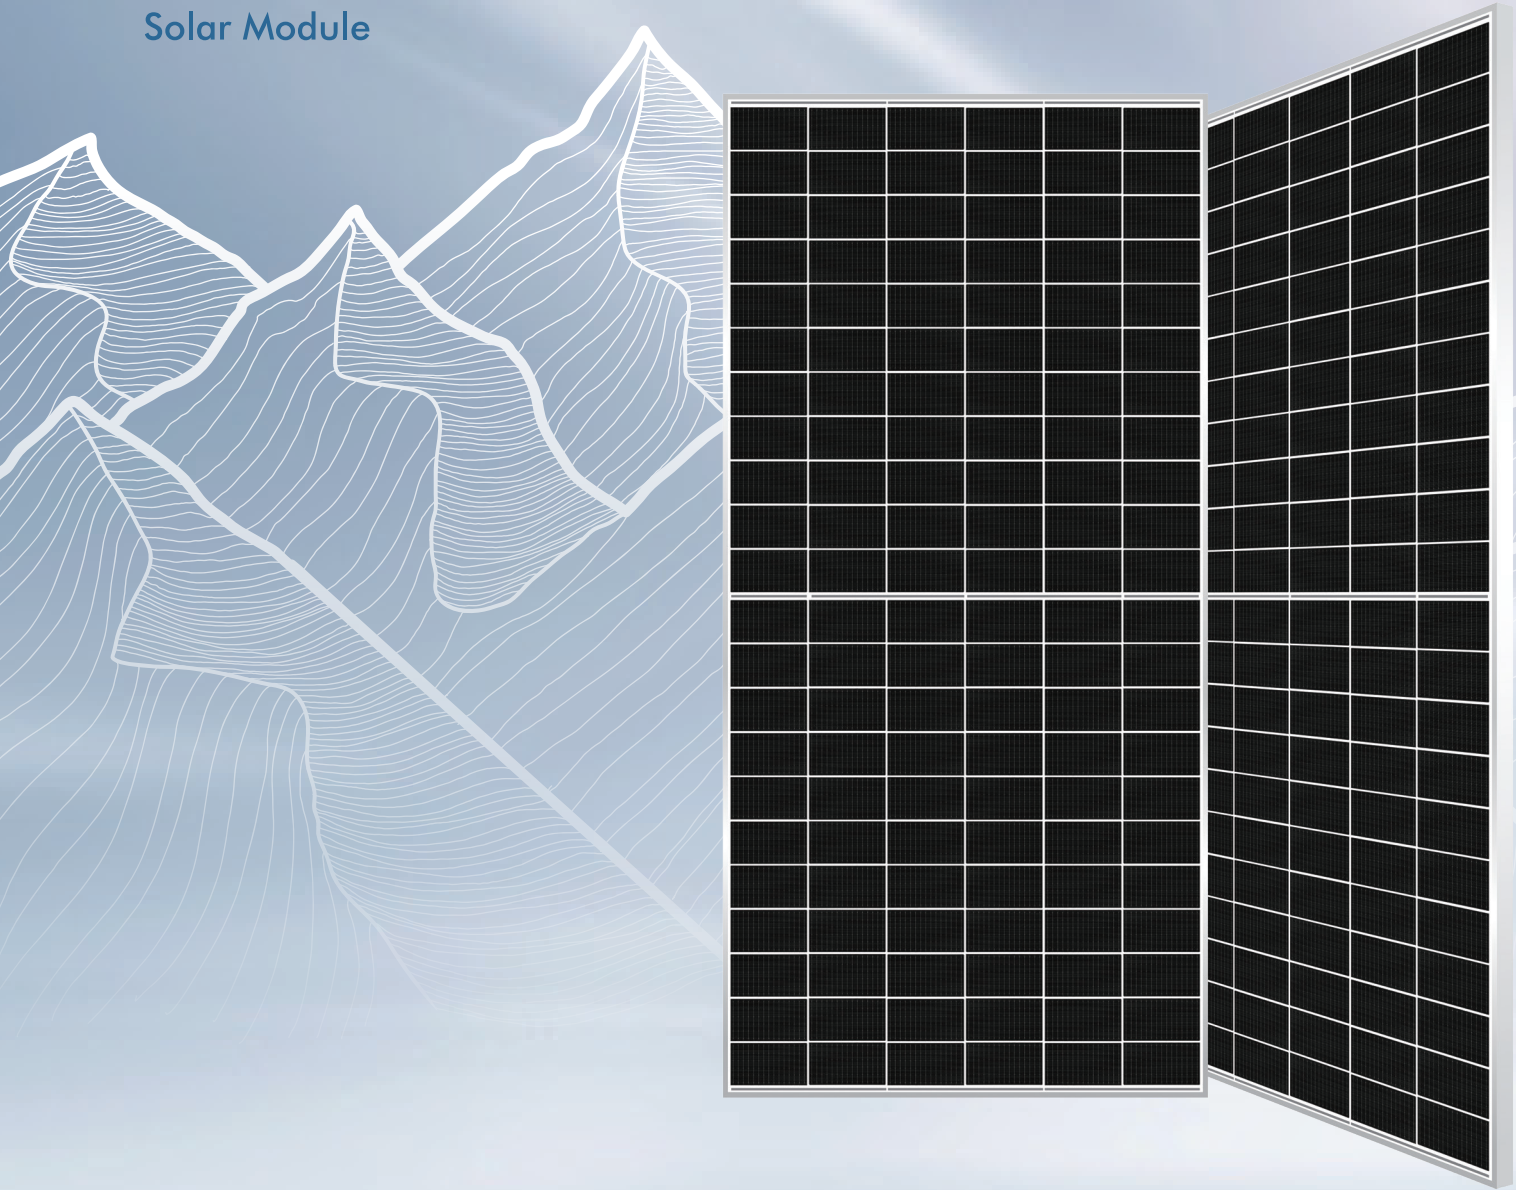

HJT

Heterojunction
Technology

G12

210mm Cell



SMBB Half-Cut
Cell Technology



Up to 85% Bifaciality



Lower BoS Cost Ensure
A Better LCOE,
Shorter Payback Time

WARRANTY

Product
Warranty

15
years

Linear
Power
Warranty

30
years



Scan&Download


The Specification and key features described in this datasheet may deviate slightly and are not guaranteed, Anhui Huasun reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the latest version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Himalaya G12 Series 710W

132-cell Bifacial HJT Half Cell Solar Module

Engineering Drawings

Unit: mm

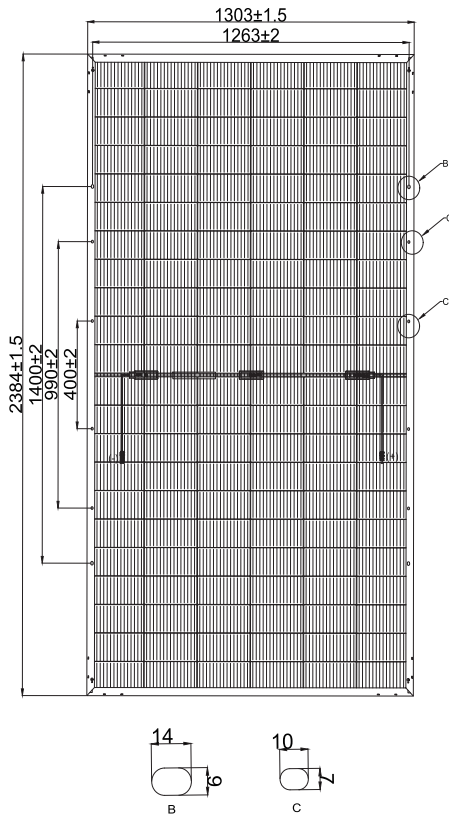

Electrical Characteristics (STC*)

HS-210-B132-DS710

| | |
|--|---------------|
| Maximum Power (P _{max}) | 710W |
| Module Efficiency (%) | 22.86% |
| Optimum Operating Voltage (V _{mp}) | 42.39V |
| Optimum Operating Current (I _{mp}) | 16.75A |
| Open Circuit Voltage (V _{oc}) | 50.44V |
| Short Circuit Current (I _{sc}) | 17.55A |
| Operating Module Temperature | -40 to +85 °C |
| Maximum System Voltage | DC1500V (IEC) |
| Maximum Series Fuse | 30A |
| Power Tolerance | 0~+5W |
| Bifaciality | 80% ± 5% |

*STC: Irradiance 1000 W/m², cell temperature 25 °C, AM=1.5. Tolerance of P_{max} is within +/- 3%.

BSTC**

| | |
|--|--------|
| Maximum Power (P _{max}) | 780W |
| Optimum Operating Voltage (V _{mp}) | 42.39V |
| Optimum Operating Current (I _{mp}) | 18.41A |
| Open Circuit Voltage (V _{oc}) | 50.44V |
| Short Circuit Current (I _{sc}) | 19.28A |

**BSTC: Front side irradiation 1000W/m², back side reflection irradiation 135W/m², AM=1.5, ambient temperature 25 °C.

Temperature Characteristics

| | |
|--|--------------|
| Nominal Operating Cell Temp. (NOCT) | 44 °C ± 2 °C |
| Temperature Coefficiency of P _{max} | -0.26%/°C |
| Temperature Coefficiency of V _{oc} | -0.24%/°C |
| Temperature Coefficiency of I _{sc} | 0.04%/°C |


Safety & Warranty

| | |
|----------------------|-------------------------|
| Safety Class | Class II |
| Product Warranty | 15 yrs Workmanship |
| Performance Warranty | 30 yrs Linear Warranty* |

* 1st year 99%, after 2nd year 0.375% annual degradation to year 30.

Mechanical Characteristics

| | |
|------------------|--|
| Cell Type | HJT Mono 210 × 105mm |
| Cell Connection | 132 (66 × 2) |
| Module Dimension | 2384 × 1303 × 35 mm |
| Weight | 38.7 kg |
| Junction Box | IP67 / IP68 |
| Output Cable | 4mm ² , 1400mm in length, length can be customized / UV Resistant |
| Connectors Type | MC4 Compatible |
| Frame | Anodised Aluminum Alloy |
| Encapsulant | POE |
| Front Load | 5400 Pa |
| Rear Load | 2400 Pa |
| Glass Thickness | (F) 2.0mm Anti-reflective surface Solar glass (B) 2.0mm Solar glass |

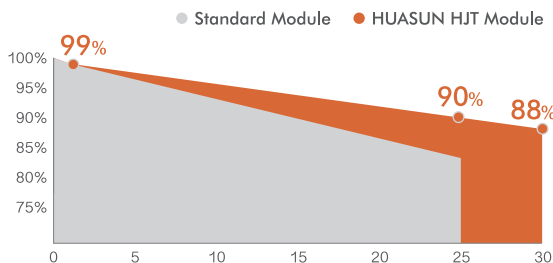

* Refer to HUASUN standard warranty for details

Shipping Configurations

| | |
|-----------------------------|-----|
| Container Length | 40' |
| Pallets Per Container | 17 |
| Modules Per Pallet (pcs) | 31 |
| Modules Per Container (pcs) | 527 |